




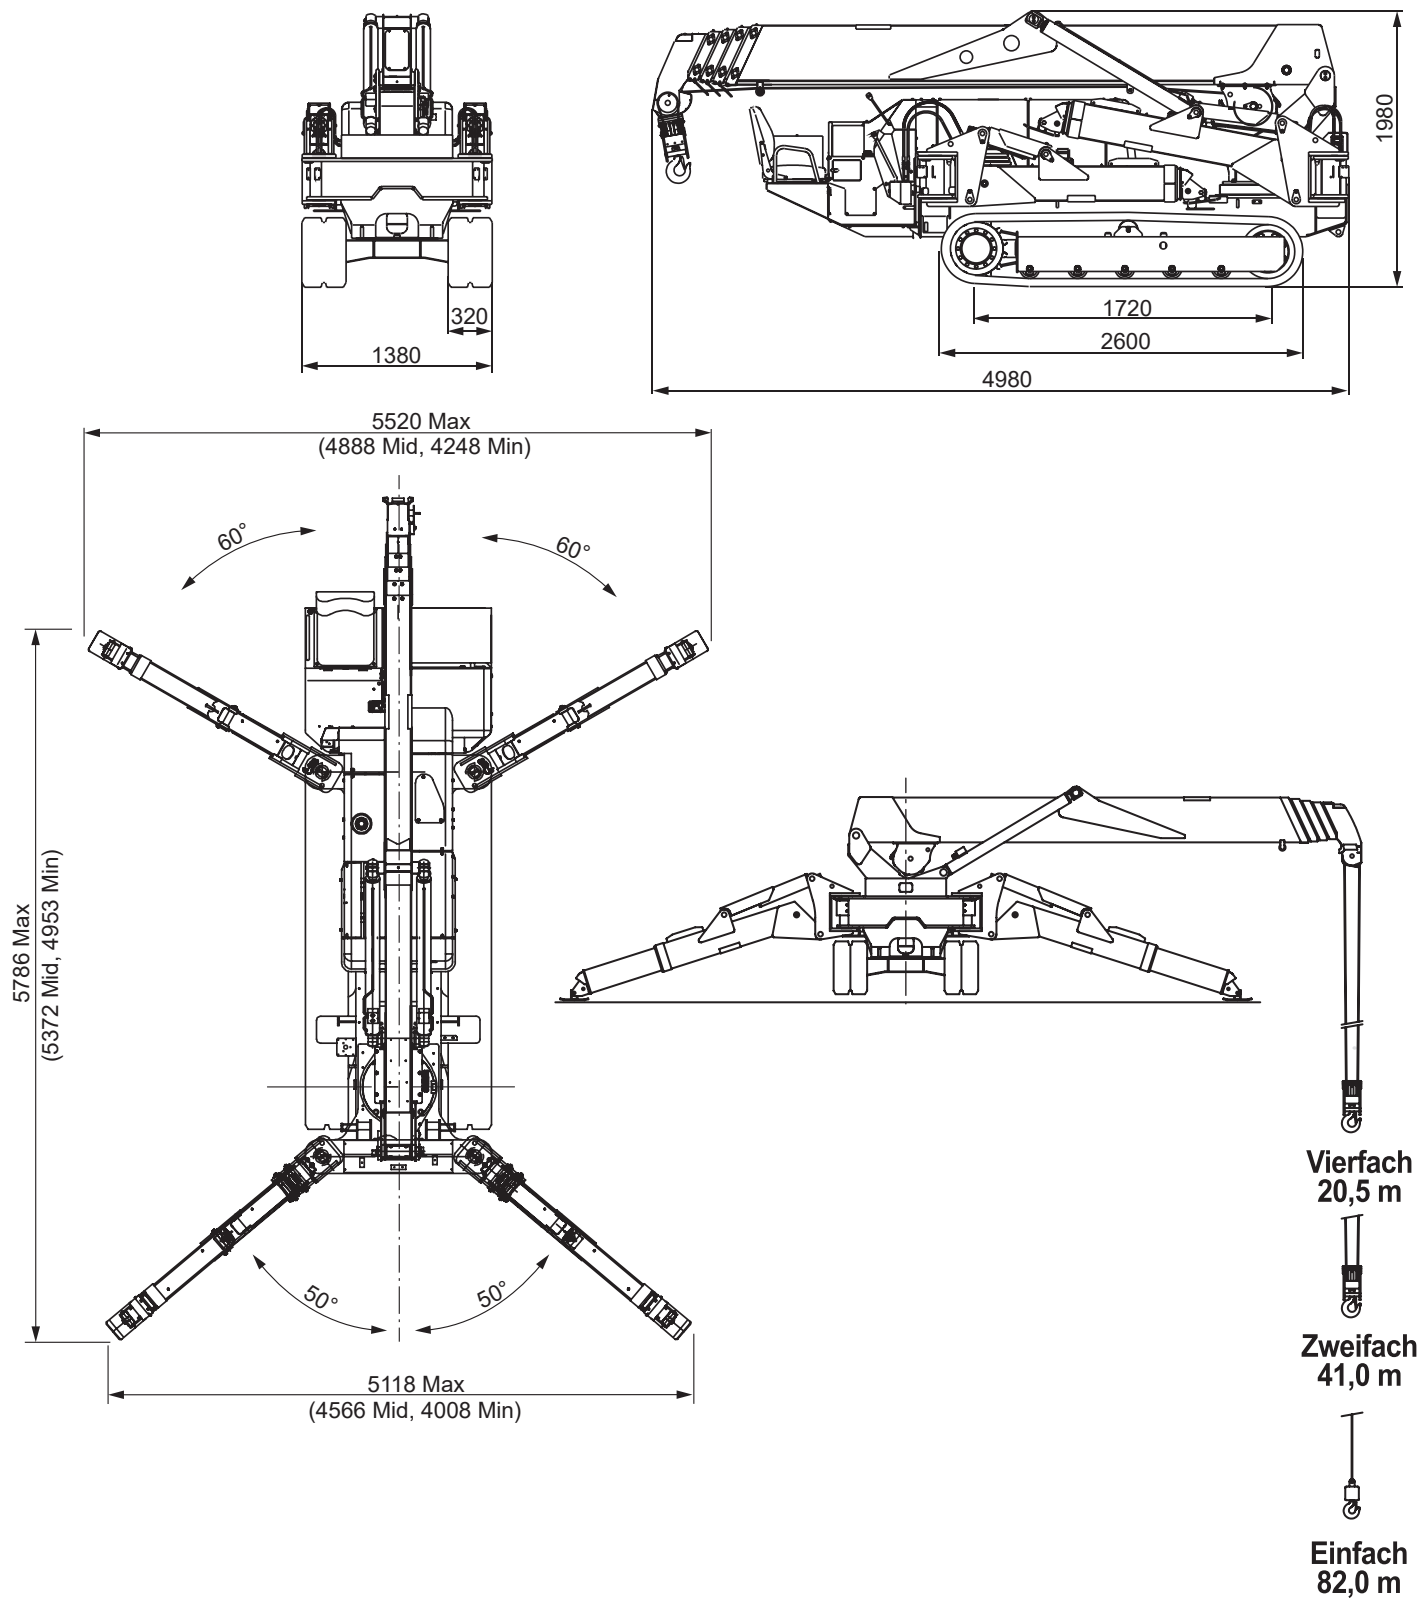


Eigengewicht 5.600 kg

Alle Angaben ohne Gewähr und vorbehaltlich technischer Änderungen und Satzfehler.
All information given are for reference only

ZERTIFIZIERT
EN ISO 9001 · SCC[®]

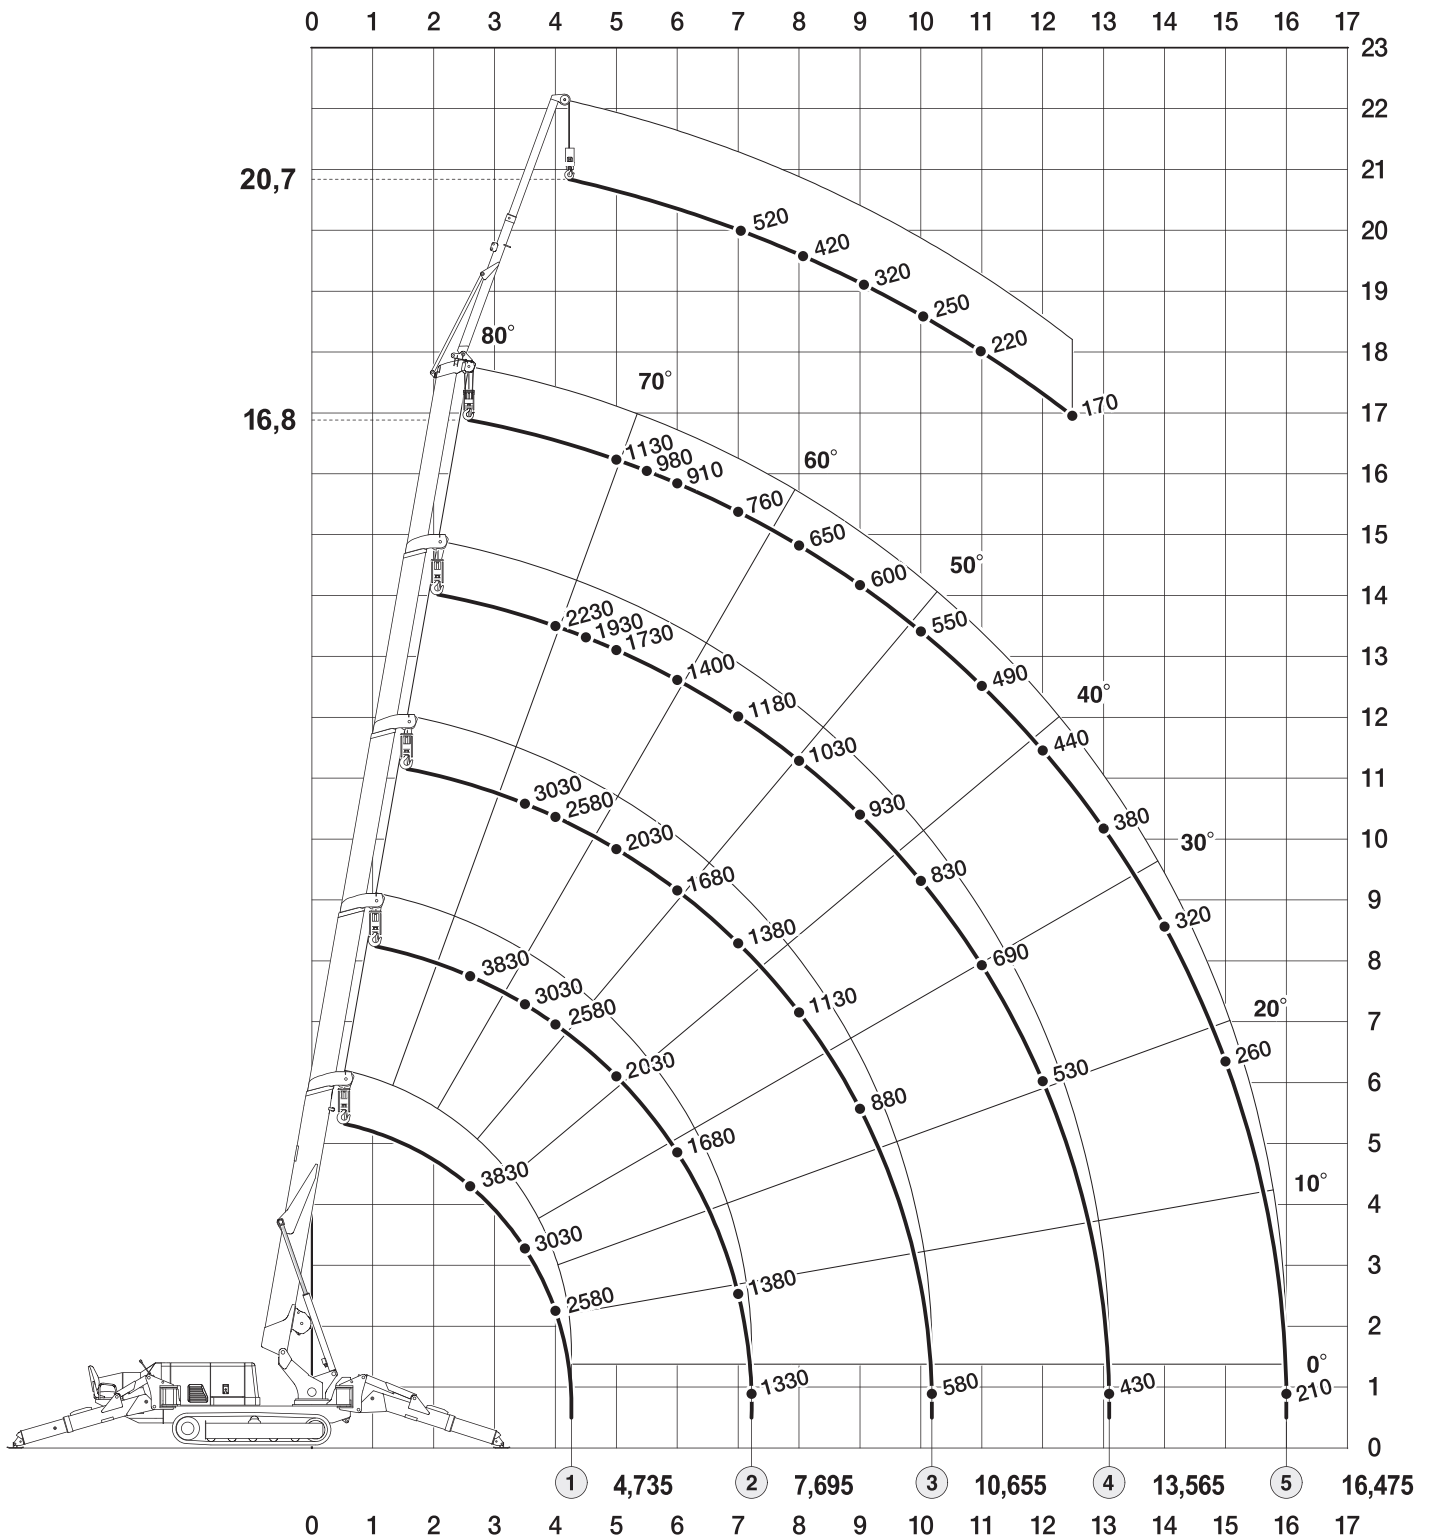



	4,735	7,695	10,655	13,565	16,475	
< 2,7	3,830	3,830				< 2,7
3,5	3,030	3,030	3,030			3,5
4	2,580	2,580	2,580	2,230		4
4,5	2,030	2,030	2,030	1,930		4,5
5	2,030	2,030	2,030	1,730	1,130	5
5,5	1,680	1,680	1,680	1,400	0,980	5,5
6	1,680	1,680	1,680	1,400	0,910	6
7	1,380	1,380	1,380	1,180	0,760	7
7,25	1,330	1,330	1,130	1,030	0,650	7,25
8			1,130	1,030	0,650	8
9			0,880	0,930	0,600	9
10			0,580	0,830	0,550	10
10,2			0,580	0,700	0,500	10,2
11				0,690	0,490	11
12				0,530	0,440	12
13				0,430	0,380	13
14					0,320	14
15					0,260	15
16					0,210	16



4,735-

16,475 m



5,37x4,89m

mittel



fest





360°



13000

	4,735	7,695	10,655	13,565	16,475	
< 2,7	3,830	3,830				< 2,7
3,5	3,030	3,030	3,030			3,5
4	2,580	2,580	2,580	2,230		4
4,5	1,880	1,880	1,880	1,830		4,5
5	1,880	1,880	1,880	1,630	1,130	5
5,5	1,430	1,430	1,430	1,330	0,980	5,5
6	1,430	1,430	1,430	1,330	0,910	6
7	1,160	1,160	1,130	1,080	0,730	7
7,25	1,120	1,120	0,900	0,880	0,630	7,25
8			0,880	0,880	0,630	8
9			0,740	0,730	0,550	9
10			0,490	0,530	0,480	10
10,2			0,490	0,480	0,430	10,2
11				0,480	0,430	11
12				0,430	0,380	12
13				0,330	0,330	13
14					0,280	14
15					0,220	15
16					0,180	16



	4,735	7,695	10,655	13,565	16,475	
< 2,7	3,830	3,830				< 2,7
3,5	3,030	3,030	3,030			3,5
4	2,580	2,580	2,580	2,230		4
4,5	1,680	1,680	1,680	1,830		4,5
5	1,680	1,680	1,680	1,630	1,130	5
5,5	1,180	1,180	1,180	1,180	0,980	5,5
6	1,180	1,180	1,180	1,180	0,880	6
7	0,930	0,930	0,880	0,830	0,730	7
7,25	0,780	0,780	0,730	0,680	0,530	7,25
8			0,730	0,680	0,530	8
9			0,580	0,550	0,450	9
10			0,400	0,430	0,420	10
10,2			0,400	0,380	0,400	10,2
11				0,380	0,370	11
12				0,350	0,330	12
13				0,310	0,280	13
14					0,240	14
15					0,190	15
16					0,150	16



4,735-

16,475 m

Mit 850 kg
Fixhaken


5,79x5,52m

maximal



fest



360°



13000

	4,735	7,695	10,655	13,565	16,475	
< 2,7	0,85	0,85				< 2,7
3,5	0,85	0,85	0,85			3,5
4	0,85	0,85	0,85	0,85		4
4,6	0,85	0,85	0,85	0,85		4,6
5		0,85	0,85	0,85	0,85	5
6		0,85	0,85	0,85	0,85	6
7,5		0,85	0,85	0,85	0,67	7,5
8			0,85	0,85	0,62	8
10,5			0,55	0,76	0,49	10,5
13,4				0,39	0,34	13,4
14					0,31	14
15					0,25	15
16,3					0,17	16,3